


STRAIGHT TEES

Schedule 160 &
 Double Extra Strong
 Carbon and ferritic alloy steel,
 ASTM A-234,
 ASME/ANSI B16.9

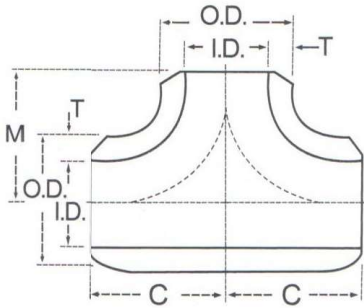

NPS	DN	Outside Diameter at Bevel O.D.	Centre to End, Run, Nominal C	Center to End, Outlet, Nominal M	SCHEDULE 160			DOUBLE EXTRA STRONG		
					Inside Diameter I.D.	Wall Thickness T	Approx. Weight	Inside Diameter I.D.	Wall Thickness T	Approx. Weight
3/4	20	1.050 27	1.12 29	1.12 29	.612 15.54	.219 5.6	.65 .29	.434 11.02	.308 7.82	1.16 .52
1	25	1.315 33	1.50 38	1.50 38	.815 20.70	.250 6.35	1.10 .50	.599 15.21	.358 9.09	1.25 .56
1 1/4	32	1.660 42	1.88 48	1.88 48	1.160 29.46	.250 6.35	2.10 .95	.896 22.76	.382 9.70	2.32 1.04
1 1/2	40	1.900 48	2.25 57	2.25 57	1.338 33.99	.281 7.14	3.00 1.35	1.100 27.94	.400 10.16	3.38 1.52
2	50	2.375 60	2.50 64	2.50 64	1.687 42.85	.344 8.74	4.5 2.03	1.503 38.18	.436 11.07	5.20 2.34
2 1/2	65	2.875 73	3.00 76	3.00 76	2.125 53.98	.375 9.53	7.0 3.15	1.771 44.98	.552 14.02	9.63 4.33
3	80	3.500 89	3.38 86	3.38 86	2.624 66.65	.438 11.13	11.5 5.18	2.300 58.42	.600 15.24	13.5 6.08
3 1/2	90	4.000 102	3.75 95	3.75 95	- -	- -	- -	2.728 69.29	.636 16.15	23 10.35
4	100	4.500 114	4.12 105	4.12 105	3.438 87.33	.531 13.49	21.5 9.7	3.152 80.06	.674 17.12	25 11
5	125	5.563 141	4.88 124	4.88 124	4.313 109.6	.625 15.88	37 17	4.063 103.2	.750 19.05	40 18
6	150	6.625 188	5.62 143	5.62 143	5.187 131.8	.719 18.26	63 28	4.897 124.4	.864 21.95	66 30
8	200	8.625 219	7.00 178	7.00 178	6.813 173.1	.906 23.01	114 51	6.875 174.6	.875 22.23	120 54
10	250	10.750 273	8.50 216	8.50 216	8.500 215.9	1.125 28.58	265 119	- -	- -	- -
12	300	12.750 324	10.00 254	10.00 254	10.126 257.2	1.312 33.32	389 175	- -	- -	- -
14	350	14.000 356	11.00 279	11.00 279	11.188 284.2	1.406 35.71	525 236	- -	- -	- -
16	400	16.000 406	12.00 305	12.00 305	12.812 325.4	1.594 40.49	820 369	- -	- -	- -

INCHES
 MILLIMETRES

POUNDS
 KILOGRAMS